




# PAC EM82K

- Pinguino PAC EM82K
- Cooling capacity **9400 Btu/h\*** - **2,4 kW**
- **Cooling** Energy Class **A**
- Fan function
- Dehumidifying function
- Exclusive condensate recirculation system
- 3 fan speed (min-med-max)
- Soft touch control panel
- Remote control with LCD display
- **24 h** electronic timer and thermostat
- Handles and castors for easy transportation
- Eco-Design
- Continuos drainage system
- 1,25 m outlet hose and window kit included
- R290 ECO-friendly gas up to 696 times more environmentally friendly than traditional gases\*\*\*\*



De’Longhi Air-conditioning

## Pinguino EM82K

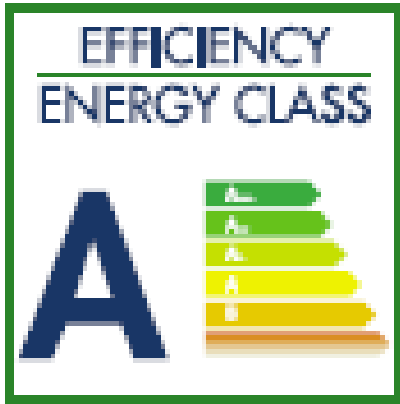

### A Energy Efficiency

Perfect match of most advanced technology and low consumption, Pinguino PAC EM82K is A class of Energy Efficiency.



### New Eco Design

Featuring a stylish and innovative design, Pinguino PAC EM82K is kind to the environment



### 700 Times Ecofriendly

Pinguino uses refrigerant gas R290, which is up to 696 times more environmentally friendly than traditional gases\*\*\*\*



### Soft Touch Control Panel

PAC EM82K has an user-friendly soft-touch control panel for an easy use of all desired functions.



PINGUINO

Technical Data	Unit	DATA
<b>Maximum cooling capacity</b>	BTU/h * – Kw**	9.400– 2,4
<b>Energy Efficiency Ratio (EER)</b>	(W/W)	2,6
For rooms up to	m³	80
Refrigerant gas		R290
Energy Efficiency Class		A
Rated voltage – frequency	V~Hz	220-240~50
Input power**	W	1000
Standby consumption	W	0,8
Maximum sound power level	dB(A)	63
Noise pressure level (min-max)	dB(A)	47-50
Air flow(min-med-max)	m³/h	340-370-400
Max dehumidifying (dehum. mode)	l/24h	43
Dimensions (hxlxp)	mm	700x425x345
Weight	Kg	31,5

\* 35°C/80% R.H.  
\*\* 35°C/40% R.H. (EN14511)

\*\*\*Internal test, initial condition 30° C and 40%RH

\*\*\*\*696 times compared to the impact of Global Warming of R410 - F-Gas Reg. 517/2014.

\*\*\*\*\* Tested in our laboratory by comparing the maximum sound level using max. fan speed vs sound level with min. fan speed